
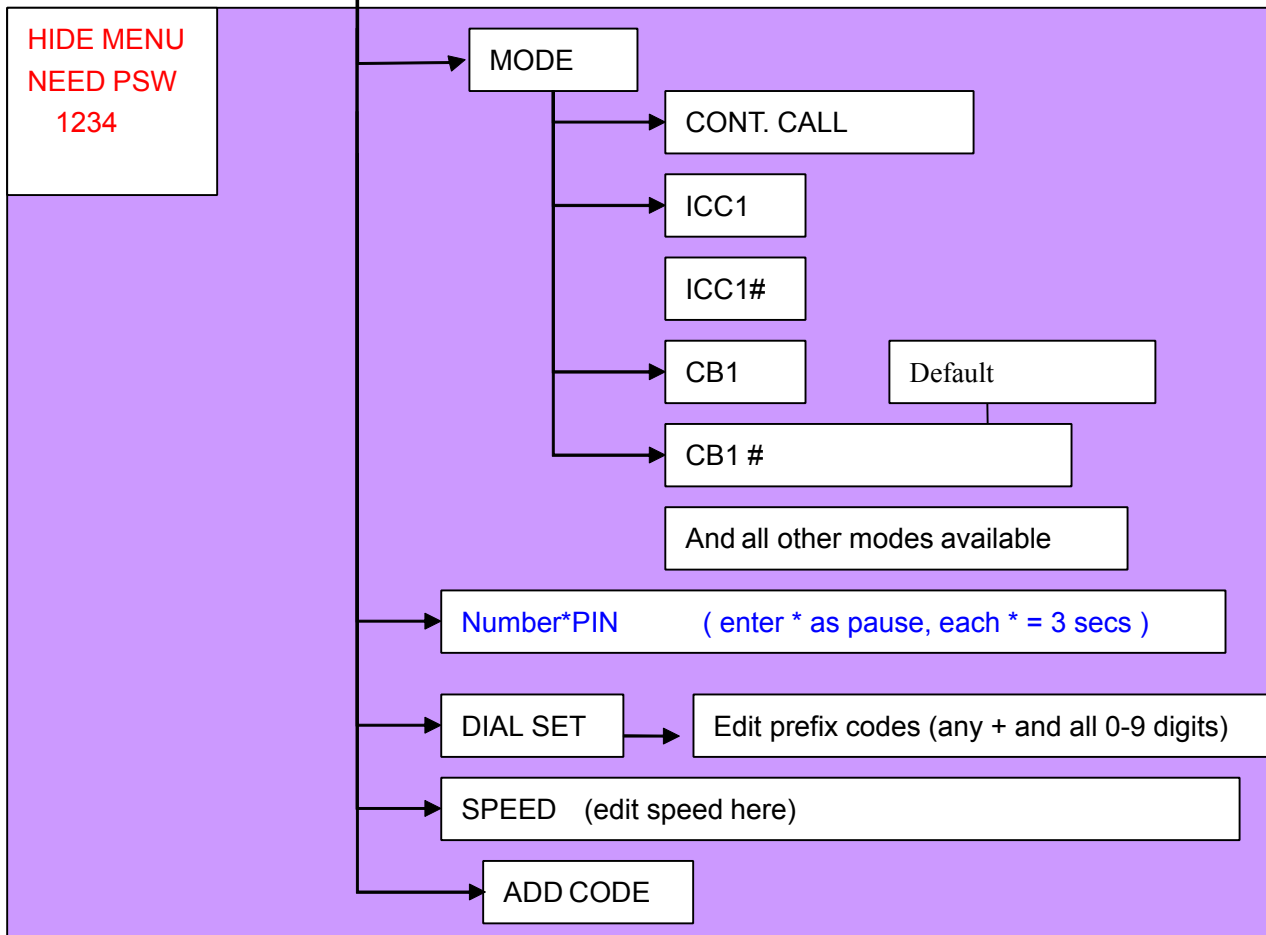


# Access+PIN version 400

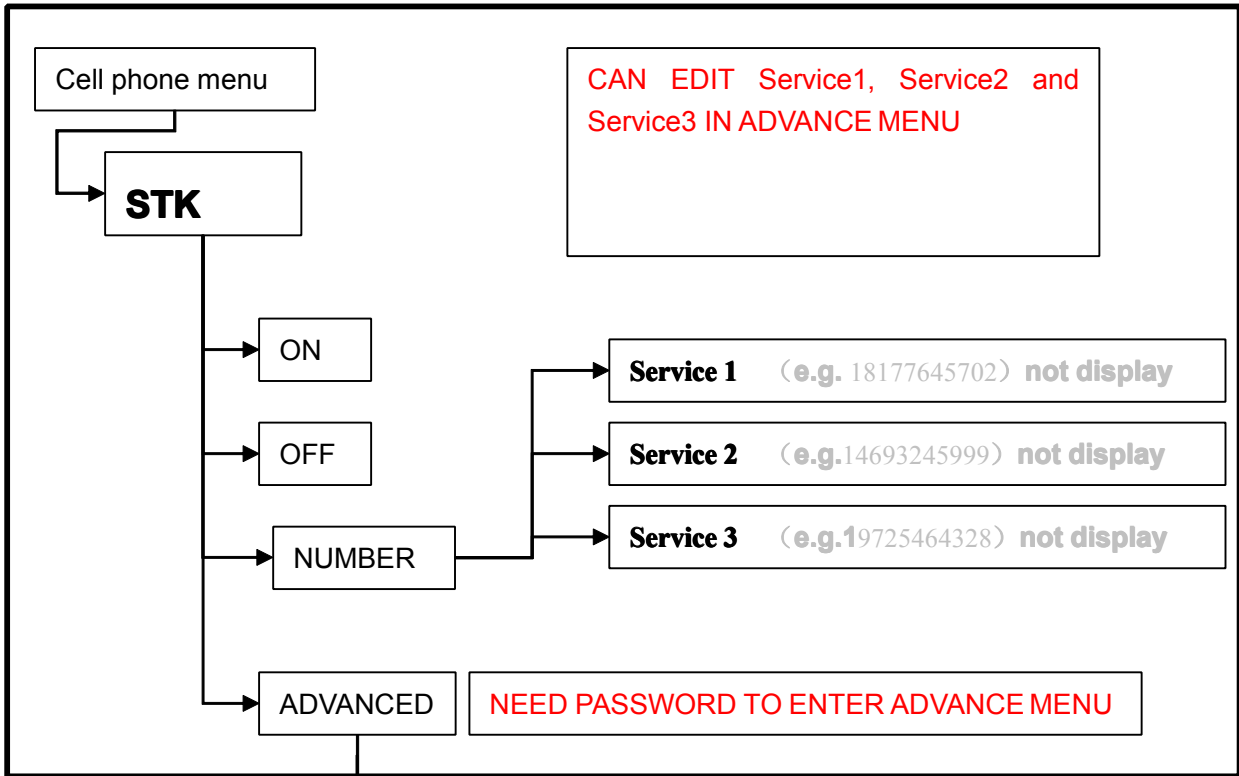


“+ “ can be set as allow prefix code. So all +xxx prefix will be routed to VOIP.

In ADD code submenu,user can set [ADD 00 FOR + ] FEATURE. Mean to replace + by 00

For example,user dial +4412345678 then dialer dialsour 004412345678#

If not set [ADD 00 FOR + ], dialer V300 just remove the + and send digits to gateway.For example:

User dial +44 1234567890 dialer will send to gateway 441234567890#

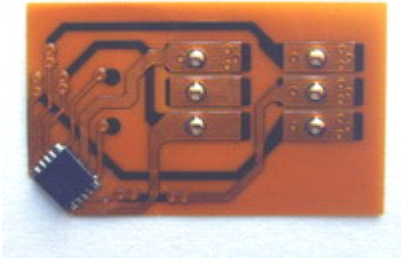

- The IC for V400 is location on back of Film PCB, and it is more thinner than V100. For most mobile phone there is no need to punch /cut GSM SIM to fit it.
- This V400 is wide compatible for almost all GSM phones, includes Iphone and blackberry.